
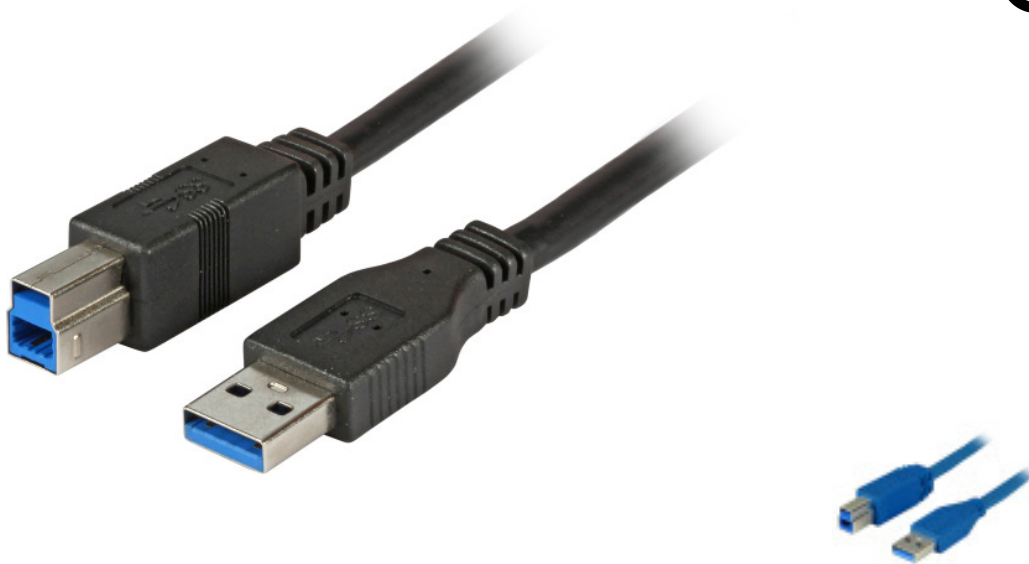


Cable USB 3.0 Premium tipo A M/tipo B M



Description

Supports data transmission rates up to 480 Mbit/s. Wire construction: AWG28 / AWG20. Shielded: Foil + 80% braiding. Plug moulded.

General data

Type of connector connection 1	USB-A
Number of poles connection 1	4
Connection type connection 1	Plug
Type of connector connection 2	USB-B
Number of poles connection 2	4
Connection type connection 2	Plug


Available variants

Article no.	Title	Length	Colour
K5256SW.0,5	Cable USB 3.0 Premium tipo A M/tipo B M negro 0.5m.	0.5 m	black
K5256SW.1	Cable USB 3.0 Premium tipo A M/tipo B M negro 1m.	1.0 m	black
K5256SW.1,5	Cable USB 3.0 Premium tipo A M/tipo B M negro 1.5m.	1.5 m	black
K5256SW.1,8	Cable USB 3.0 Premium tipo A M/tipo B M negro 1.8m.	1.8 m	black
K5256SW.3	Cable USB 3.0 Premium tipo A M/tipo B M negro 3m.	3.0 m	black
K5256SW.5	Cable USB 3.0 Premium tipo A M/tipo B M negro 5m.	5.0 m	black



Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

P1: M-942A
P2: M-945A

Customer No: No.6

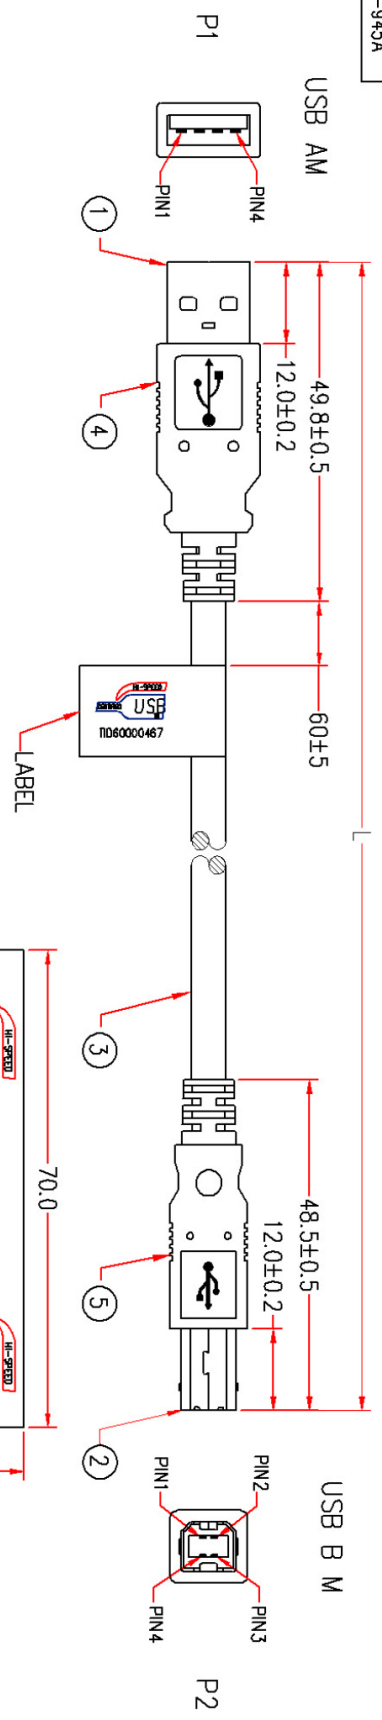

ITEM NO.	LENGTH(L)
K5256SW.0.22	220mm
K5256SW.0.5	500mm
K5256SW.1	1000mm
K5256SW.1.8	1800mm
K5256SW.3	3000mm
K5256SW.5	5000mm
K5256SW.2	2000mm
K5256SW.1.5	1500mm
K5256SW.4.5	4500mm

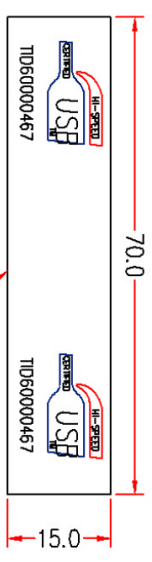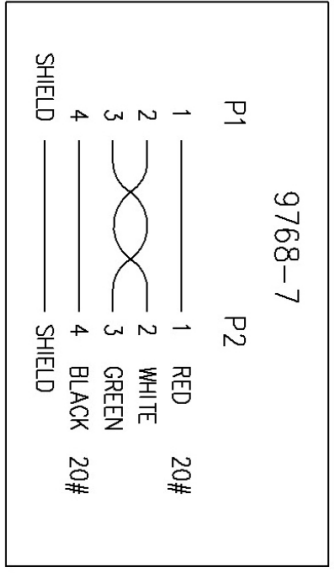

MARKING:
HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1PR+20AWG/2C VW-1 80°C 30V

The cable must accord:
Operating temperature: between -20°C and +80°C
Storage temperature: between -40°C and +85°C

* NOTE: All relevant materials are compiled with RoHS directive.
This cable is silicone free.
100% SHORT AND PENN TEST

REV.14 2017.12.15	TAKE OFF LENGTH 10M		
REV.13 2017.10.13	ADD LENGTH 2.2M AND ITEM NO.K5256SW.2.2		
REV.11 2016.12.19	ADD LENGTH 0.22M	REV.12 2017.04.11	ADD LENGTH 4.5M AND ITEM NO.K5256SW.4.5
REV.9 2015.05.27	ADD LENGTH 10M	REV.10 2015.09.15	MODIFY LETTERING
REV.8 2015.2.04	MODIFY DRAWING & LENGTH		
REV.7 2013.11.05	TAKE OFF LENGTH 2M		
REV.6 2013.1.30	ADD CABLE AND MOLDED PVC COLD-RESISTANT TEMPERATURE		
REV.5 2013.1.23	ADD ITEM NO. K5256SW.2 AND MODIFY Operating temperature&Storage temperature		
REV.4 2009.5.21	ADD Operating temperature&Storage temperature		
REV.3 2009.3.19	ADD LENGTH 0.5M AND THIS CABLE IS SILICONE FREE		
REV.2 2008.4.10	MODIFY LENGTH FOR 2M TO 1.8M		
REV.1 2008.1.08	ADD LENGTH		

No.	DESCRIPTION	REVISION	Q'TY	SUPPLIER
1	USB A MALE 24 GOLD PLATING 30# ON CONTACTS WHITE INSULATION THREE PINS SOLDER FREE	AIHA12-0106	1set	M108
2	USB B MALE 24 GOLD PLATING 30# ON CONTACTS WHITE INSULATION THREE PINS SOLDER FREE	AIHB14-0108	1set	M108
3	USB 2.0 CABLE "UL STYLE" 1 TWISTED PAIR 28AWG AND 2C 20AWG, BRAID 80% OD 5.0mm, JACKET BLACK, (-40°C~+85°C,COLD-RESISTANT)	HSKH22-030AK09	L-20mm	M.304
4	MOLDED PVC BLACK(-40°C~+85°C,COLD-RESISTANT)	HIHF10-030AK09		M.304
5	MOLDED PVC BLACK(-40°C~+85°C,COLD-RESISTANT)	HIHF10-030AK09		M.304



Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.