


CABLE DE RED C14 M/C13 H CON SEGURO

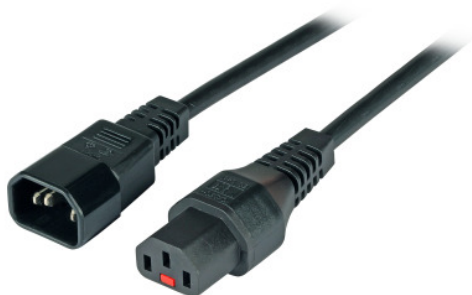

TECHNICAL PARAMETERS

With „IEC Lock“: prevents accidentally removing of the C13 jack from devices

After connecting, the C13 jack only can be released after sliding back the red latch

10 A / 250 V VDE tested

Colour black (optional: orange, blue, grey, white)

International standardised connectors

Connection 1:	Cold device plug (IEC 320)
Connection 2:	Cold device plug straight, female
Number of cores:	3
Material outer sheath:	PVC
Temperature resistance:	0 - 70 °C
Nominal voltage:	250 V
Spiralized cable:	False
Protective conductor:	False
Oil resistant (acc. EN 60811-2-1):	False
With cord switch:	False

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.