


CARCASA SUB D 9 METÁLICA 35° TORNILLO LARGO

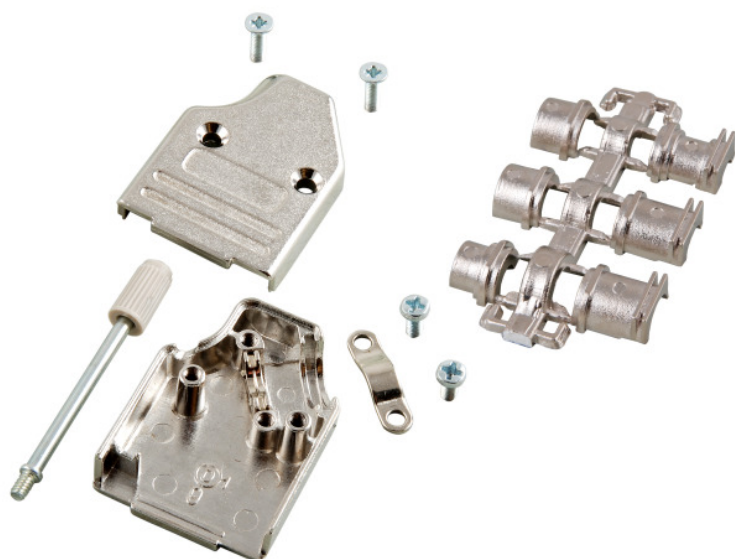

TECHNICAL PARAMETERS

- Full metal housing, 35° cable outlet
- Thumb screws UNC 4-40
- For cable diameter up to 13.0 mm
- Attenuation: > 40 dB between 30 MHz and 1 GHz
- Incl. HF shielded boots for cable diameters 4 - 6 mm, 6 - 8 mm, 8 - 10 mm

Material:	zinc die-cast
Two piece:	True
Separable:	True
Locking mechanism:	screw

Article no.	Title	Type	Suitable for number of poles	Colour
CS9MTL35	Full Metal Cover 35°, E-MHDM35 09-K	E-MHDM35 09-K	9	silver
CS15MTL35	Full Metal Cover 35°, E-MHDM35 15-K	E-MHDM35 15-K	15	silver
CS25MTL35	Full Metal Cover 35°, E-MHDM35 25-K	E-MHDM35 25-K	25	silver
CS37MTL35	Full Metal Cover 35°, E-MHDM35 37-K	E-MHDM35 37-K	37	silver

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.