


CARCASA SUB D 9 METÁLICA 45° TORNILLO LARGO

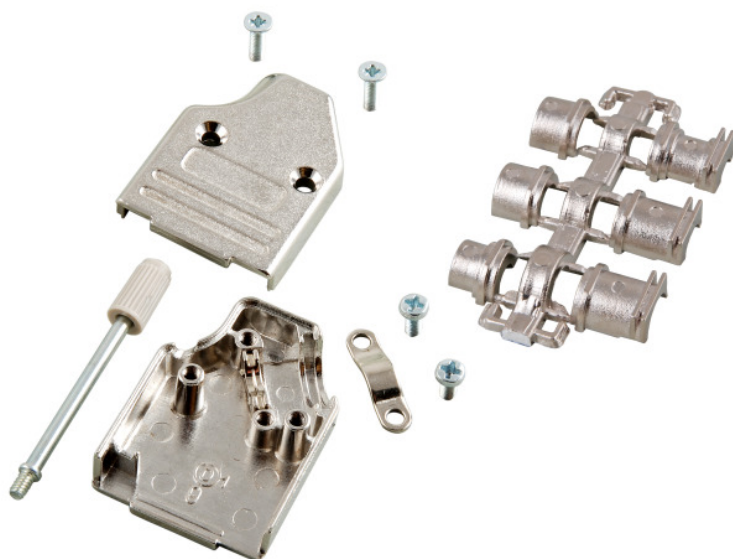

TECHNICAL PARAMETERS

- Full metal housing, 35° cable outlet
- Thumb screws UNC 4-40
- For cable diameter up to 13.0 mm
- Attenuation: > 40 dB between 30 MHz and 1 GHz
- Incl. HF shielded boots for cable diameters 4 - 6 mm, 6 - 8 mm, 8 - 10 mm

Material: zinc die-cast
Two piece: True
Separable: True
Locking mechanism: screw

| Article no. | Title | Type | Suitable for number of poles | Colour |
|-------------|-------------------------------------|---------------|------------------------------|--------|
| CS9MTL45 | Full Metal Cover 35°, E-MHDM35 09-K | E-MHDM35 09-K | 9 | silver |
| CS15MTL45 | Full Metal Cover 35°, E-MHDM35 15-K | E-MHDM35 15-K | 15 | silver |
| CS25MTL45 | Full Metal Cover 35°, E-MHDM35 25-K | E-MHDM35 25-K | 25 | silver |
| CS37MTL45 | Full Metal Cover 35°, E-MHDM35 37-K | E-MHDM35 37-K | 37 | silver |

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.