

LATIGUILLO CAT. 6 SFTP LSZH




TECHNICAL PARAMETERS

1 Gigabit Ethernet Cat.6 250 MHz patch cable, 2 x RJ45 plug shielded, IEC 60603-7-5, S/FTP 4 x 2 x AWG27/7 PiMF LSZH Ø=6.2 mm, TIA/EIA 568B coded, Flame retardant IEC 60332-1, halogenfree IEC 60754-2, low smoke IEC 61034, Moulded strain relief boot with latch protection

Category:	6
Cable type:	S/FTP
Type of connector connection 1:	RJ45 8(8)
Type of connector connection 2:	RJ45 8(8)
Colour outer sheath:	brown
Anti-kink sleeve:	plugged in
Locking lever:	True
Colour anti-kink sleeve:	brown
Flame retardant version:	True
Halogen free:	True
Oil resistant (acc. EN 60811-2-1):	False
Cable construction:	4x2
NVP value:	- %
Pin assignment:	1:1
AWG-size:	27

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Technical drawings

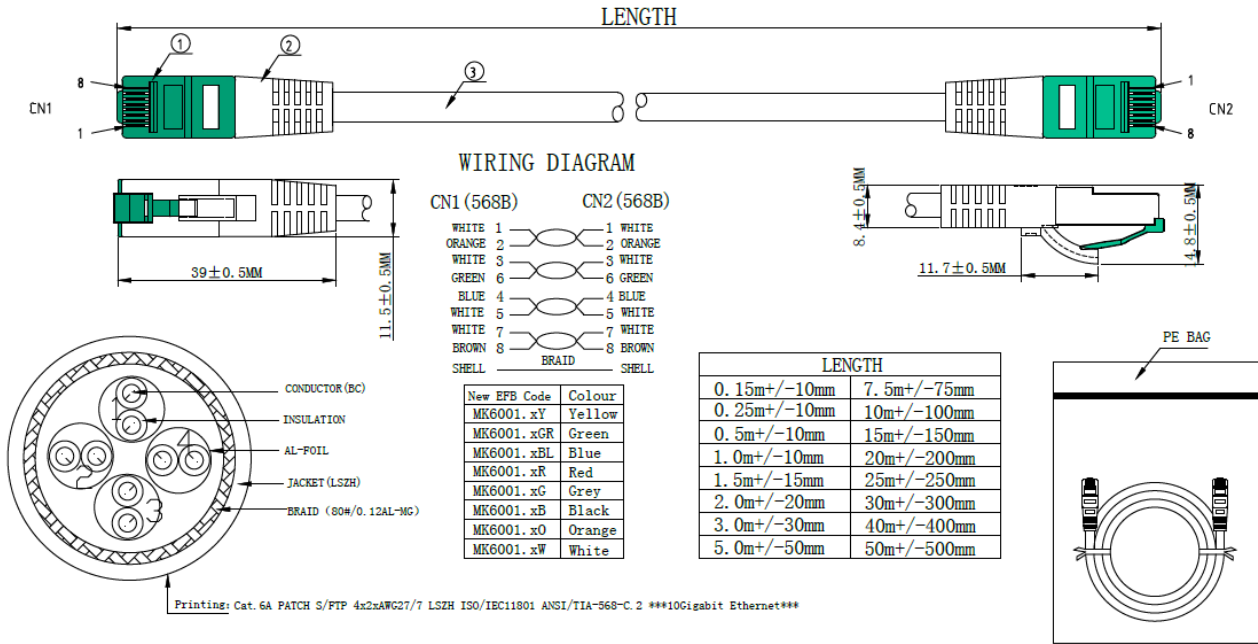

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.