

LATIGUILLO PLANO

CAT. 6A UTP



✓ Cat. 6A

✓ PVC

✓ Color: Negro

✓ 100% CU

Descripción

The unshielded Cat.6A RJ45 **flat patch cable** ensures excellent performance for **10 Gigabit Ethernet** applications. The flat patch cable impresses with its flat construction and is with **1.6mm height ideal for laying e.g. behind ledges or under a carpet**. The cast grommet captivates with its **slim design** and thus simplifies the plugging process in confined spaces.

Sheath material: PVC

Cross section: 4 x 2 x **AWG30 / 7**

Cable diameter: **6.0x1.6mm**

Plug type: **short plug**

Datos Generales

Category	6A
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
Connector type	RJ45 short version
Contacts	3 μ" gold plated
Pin assignment	1:1
Allocation	acc. TIA/EIA 568B
Type	Unshielded
Anti-kink sleeve	moulded
Colour anti-kink sleeve	black
Locking lever	Yes

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

LATIGUILLO PLANO

CAT. 6A UTP

Cable construction

Cable structure	U/UTP
Cable construction	4x2
AWG-size/strands per core	30/7
Conductor Material	Copper


Cable sheath

Silicone-free	Yes
Jacket material	PVC
Colour outer sheath	black
Printing	SLIM PATCHCABLE U/UTP CAT.6A ***10GB***
Outer diameter of the cable	6.0*1.6 mm

Electrical characteristics

NVP value	76 %
Impedance	100 ±15 Ω
Conductor resistance DC	376 Ω/km
Loop resistance	<371 Ω/km
Resistance unbalance	<4 %
Insulation resistance	100 MΩ
Test voltage	1000 (V DC, 1min) core/core und core/screen
POE class	PoE acc. to IEEE802.3af;PoE+ acc. to IEEE802.3at;4PPoE acc. to IEEE802.3bt

K8107SW.0,25	Latiguillo plano Cat. 6A UTP 0.25m negro	0.25 m
K8107SW.0,5	Latiguillo plano Cat. 6A UTP 0.5m negro	0.5 m
K8107SW.1	Latiguillo plano Cat. 6A UTP 1m negro	1.0 m
K8107SW.1,5	Latiguillo plano Cat. 6A UTP 1.5m negro	1.5 m
K8107SW.2	Latiguillo plano Cat. 6A UTP 2m negro	2.0 m
K8107SW.5	Latiguillo plano Cat. 6A UTP 5m negro	5.0 m

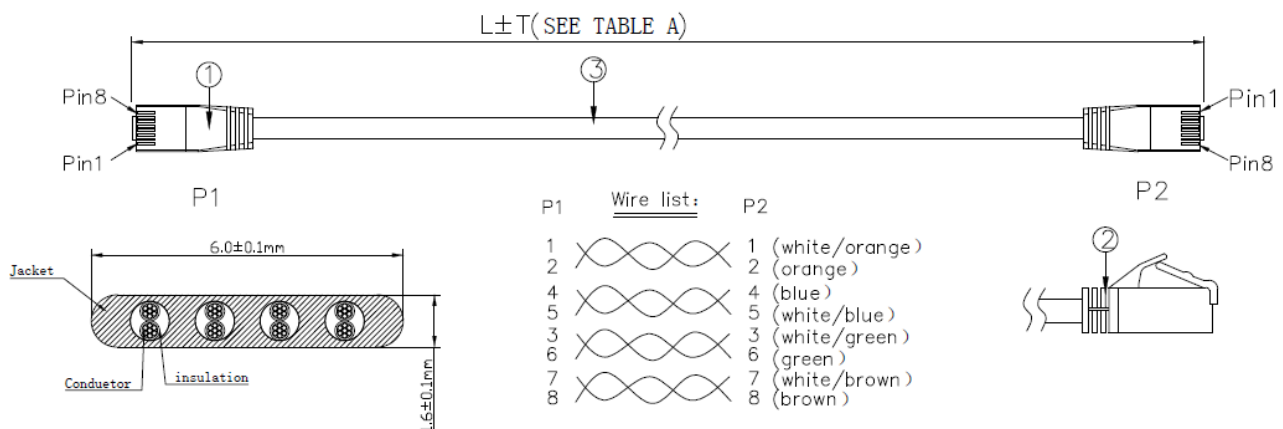

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.