

Latiguillo Cat. 5 UTP LSZH



Cat.5E

1Gbit



Description

Cable description:

U/UTP Cat.5e AWG24/7 stranded 4 pairs cable
Jacket: LSZH, low smoke & Halogenfree
OD: 5,4mm

RJ45 Connector:

2 x Cat.5e RJ45 plugs 1:1 IEC60603-7
Moulded strain relief with bend and latch protection
3um gold plated contacts

Application:

ISO IEC 11801, EIA/TIA 568

Printing, Cable:

Cat.5e UTP Patch cable AWG24/7 LSZH

Printing, Polybag label:

Neutral polybag with label printet:
Cat.5e UTP Patch Cable AWG 24/7 LSZH Art. No. and EAN number + barcode

Printing, Carton box label and Standard neutral carton box:

Cat.5e UTP Patch Cable AWG 24/7 LSZH + Color Art. No. and EAN number + barcode

General data

Category	5E
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
Connector type	RJ45 Standard
Cable type acc. to Manufacturer	U/UTP
Contacts	3 μ" Vergoldet

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Latiguillo Cat. 5 UTP LSZH

Electrical characteristics

Impedance	100 ±15 Ω
-----------	-----------

Transmission characteristics


Bandwidth	100MHz
Transmission	2.5Gbit

Standards, approvals, certifications

Cabling Standard	ISO/IEC 11801;EN50173
Connector	IEC 60603-7-2

Available variants

Article no.	Title	Length	Length tolerance
K8110GN.0,5	Latiguillo Cat. 5 UTP LSZH 0.5m. verde	0.5 m	±5 %
K8110GN.1	Latiguillo Cat. 5 UTP LSZH 1m. verde	1.0 m	±5 %
K8110GN.1,5	Latiguillo Cat. 5 UTP LSZH 1.5m. verde	1.5 m	±5 %
K8110GN.2	Latiguillo Cat. 5 UTP LSZH 2m. verde	2.0 m	±5 %
K8110GN.3	Latiguillo Cat. 5 UTP LSZH 3m. verde	3.0 m	±5 %
K8110GN.5	Latiguillo Cat. 5 UTP LSZH 5m. verde	5.0 m	±5 %
K8110GN.7,5	Latiguillo Cat. 5 UTP LSZH 7.5m. verde	7.5 m	±5 %
K8110GN.10	Latiguillo Cat. 5 UTP LSZH 10m. verde	10.0 m	±5 %
K8110GN.15	Latiguillo Cat. 5 UTP LSZH 15m. verde	15.0 m	±5 %
K8110GN.20	Latiguillo Cat. 5 UTP LSZH 20m. verde	20.0 m	±5 %
K8110GN.25	Latiguillo Cat. 5 UTP LSZH 25m. verde	25.0 m	±5 %
K8110GN.30	Latiguillo Cat. 5 UTP LSZH 30m. verde	30.0 m	±5 %
K8110GN.4	Latiguillo Cat. 5 UTP LSZH 4m. verde	4.0 m	±5 %

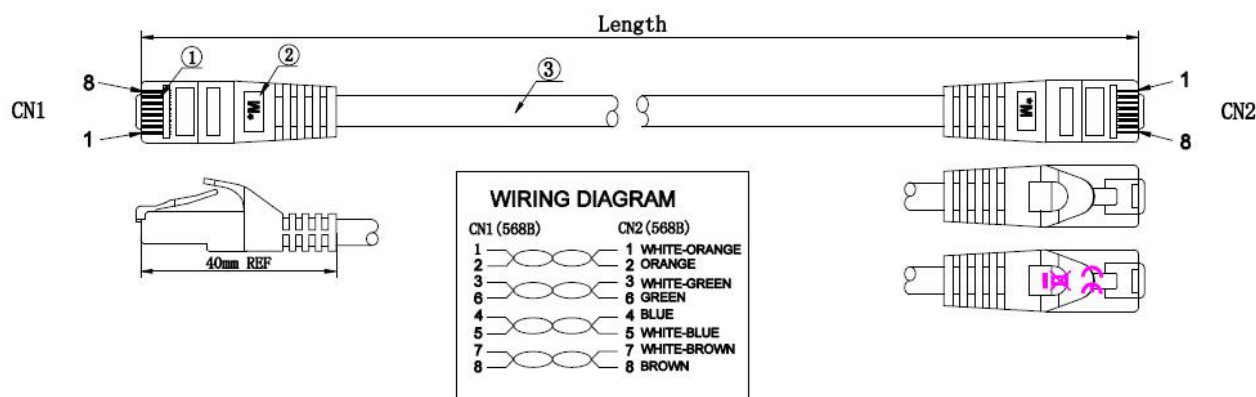

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.