


# Latiguillo Cat.6A S/FTP con cable Cat.7 LSZH blanco

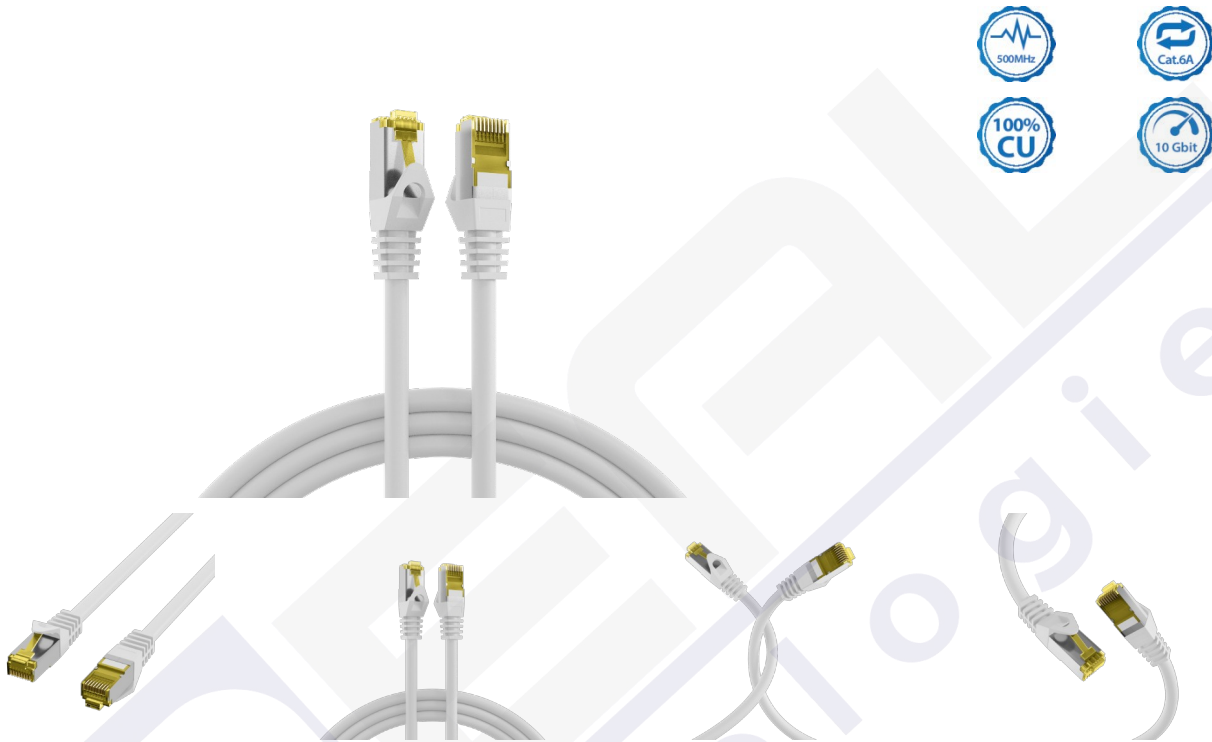

## General data

The shielded Cat.6A RJ45 patch cable ensures excellent performance for 10 Gigabit Ethernet applications. The moulded grommet captivates with its **slim design** and thus simplifies the insertion process in cramped conditions.

Cross section 4 x 2 x AWG26 / 7

Moulded grommet, slim design

**Length imprint on the boot**

## Allgemeine Daten

Suitable for degree of protection (IP)	IP20
Cable type	S/FTP
Pin assignment	1:1
Locking lever	True
Fire retardant version	True
Model	Shielded
Material outer sheath	LSZH
Connector type	RJ45 Standard yellow
Contacts	Gold plated

*Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.*

# Latiguillo Cat.6A S/FTP con cable Cat.7 LSZH blanco

Allocation	acc. TIA/EIA 568B
Colour anti-kink sleeve	white
Area of Application	Industrial Ethernet
Length imprint	True
Anti-kink sleeve	plugged in
Current Rating	max. 1 A
Colour outer sheath	white
Halogen free	True
Category	6A (TIA)

## Mechanische Eigenschaften

Conductive shield	Selected shield contact
Bending radius	>32.5 mm
Mating cycles	2000

## Kabelaufbau

Raw cable	Cat.7
Type of connector connection 2	RJ45 8(8)
Type of connector connection 1	RJ45 8(8)
Conductor Material	Copper
AWG-size	26/7
Cable construction	4x2

## Kabelmantel

Outer diameter of the cable	6.5 mm
Printing	Cat.7 raw cable S/FTP 4x2xAWG26/7 PIMF 600MHz ISO/IEC 11801 & EN50173-1 TIA/EIA 568B-2.1 Halogen Free ***10GIGABIT*** <a href="http://www.efb-elektronik.de">www.efb-elektronik.de</a>
Oil resistant (according to EN 60811-404)	False
Halogen-free	yes
Flame retardant	acc. IEC60332-1
Silicone-free	True
Low smoke	acc. IEC61034

## Umgebungsbedingungen

Temperature range	-20 - 60 °C
-------------------	-------------

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

# Latiguillo Cat.6A S/FTP con cable Cat.7 LSZH blanco



## Elektrische Eigenschaften

Insulation Resistance	10 MΩ
Test voltage	1000 V DC, 1min
Loop resistance	292 Ω/km
Contact Resistance	30 mΩ
POE class	PoE+ acc. to IEEE802.3at
Operating-/ tempering voltage	max. 50 V DC
Impedance	100 ±5 Ω
Resistance unbalance	5 %
Conductor resistance DC	146 Ω/km

## Übertragungstechnische Eigenschaften

Transmission	10Gbit
Bandwidth	500MHz

## Normen, Zulassungen, Zertifizierungen

Oil resistant (acc. EN 60811-2-1)	False
Connector	IEC 60603-7-51


## Available variants

ArtNr.	Bezeichnung	Length Längentoleranz
MK7001.0,15W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 0,15m, white	0.15 m ±5 %
MK7001.0,25W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 0,25m, white	0.25 m ±5 %
MK7001.0,5W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 0,5m, white	0.5 m ±5 %
MK7001.1W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 1m, white	1.0 m ±5 %
MK7001.1,5W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 1,5m, white	1.5 m ±5 %
MK7001.2W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 2m, white	2.0 m ±5 %
MK7001.3W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 3m, white	3.0 m ±5 %
MK7001.5W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 5m, white	5.0 m ±5 %
MK7001.7,5W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 7,5m, white	7.5 m ±5 %
MK7001.10W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 10m, white	10.0 m ±5 %
MK7001.15W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 15m, white	15.0 m ±5 %
MK7001.20W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 20m, white	20.0 m ±5 %
MK7001.25W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 25m, white	25.0 m ±5 %
MK7001.30W	RJ45 Patch cable S/FTP, Cat.6A, LSZH, Cat.7 Raw cable, 30m, white	30.0 m ±5 %

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

# Latiguillo Cat.6A S/FTP con cable Cat.7 LSZH blanco

## Drawings

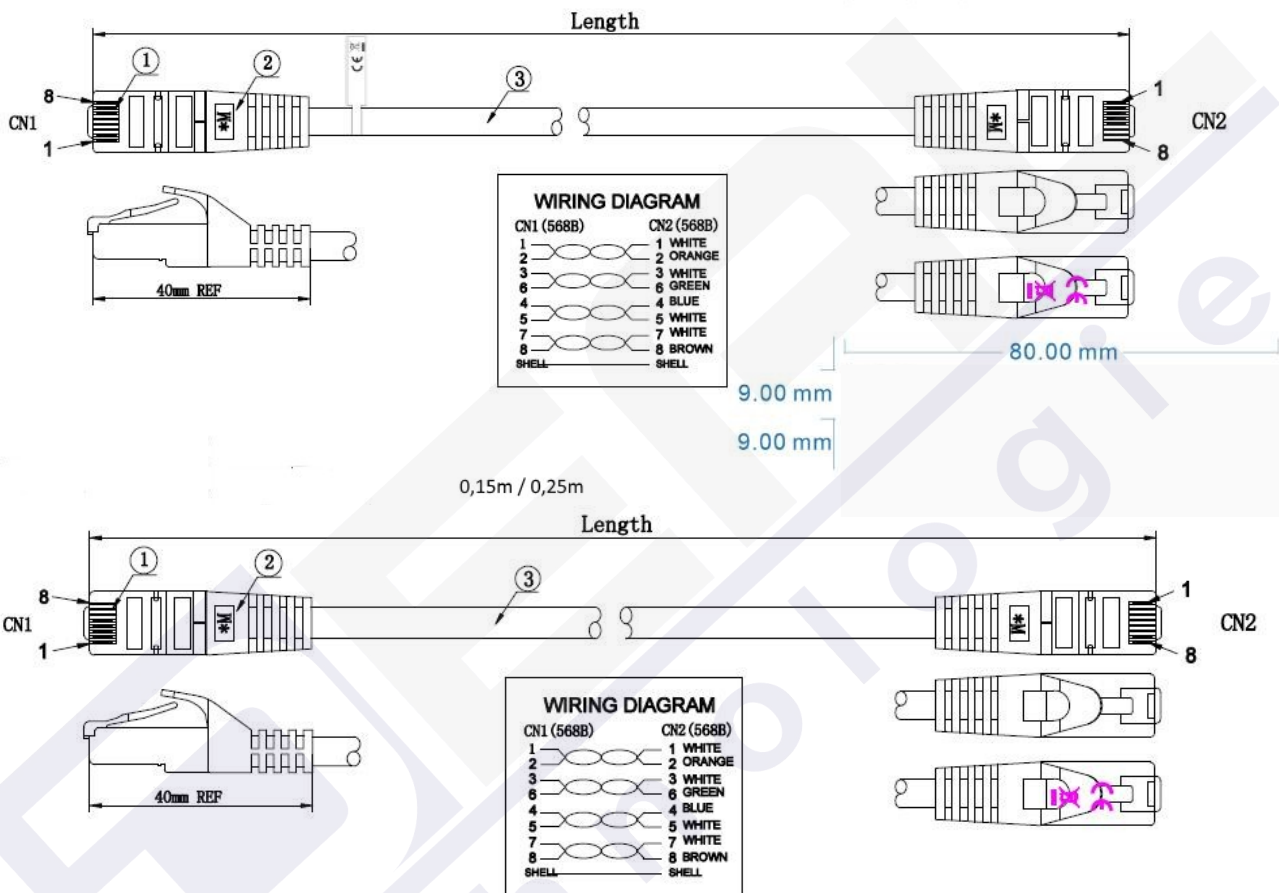

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.