


PIG-TAIL LC SM 9/125 OS2 0.9MM

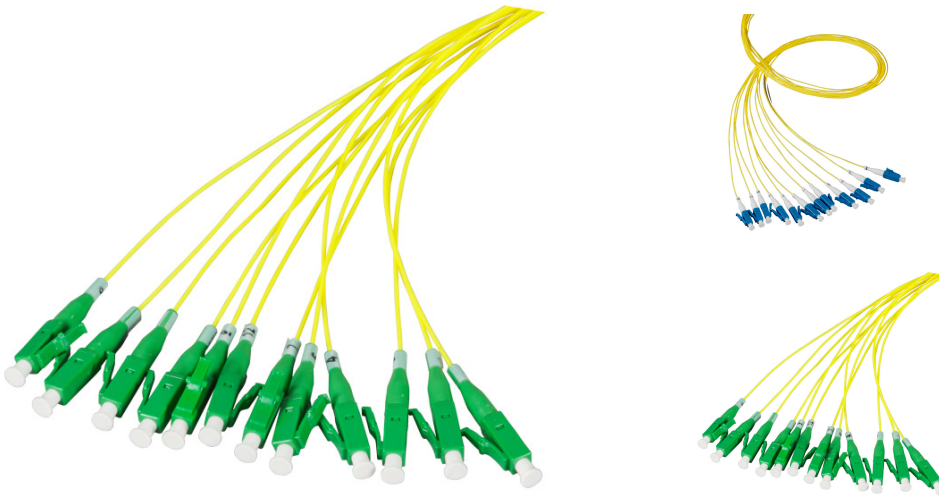

General data

The LC fiber pigtail has a primary coating (900µ) in the colour of the respective category (see table). The colour of the primary coating is equal to the colour of the secondary coating. A numeric connector coding 1 .. 12 simplifies the allocation of the ports. **The pigtails can be ordered separately.** Because the standard batch size for ordering pigtails is 12, in a polybag are 12 pigtails. Each connector is packed separately for an easy remove of each pigtail.

Every PU contains an individual measuring protocol.

Allgemeine Daten

Core type	Semi tight
Outer Diameter	0.9 mm
Anti-kink sleeve	Put-on
Material outer sheath	LSZH
Type	Conductor pigtail

Mechanische Eigenschaften

Max. Tension	3 N
Mion. Bending Radius Static	9 mm
Minimaler Biegeradius Dynamic	18 mm

Abmessungen

Length	2.0 m
--------	-------

Umgebungsbedingungen

Operating Temperature	-20 - 70 °C
-----------------------	-------------

Normen, Zulassungen, Zertifizierungen

Connector Conform to Standard	IEC61754-20
Cable Conform to Standard	IEC60793-2

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.