


F/UTP CAT.6 PE (outdoor)

DESCRIPTION

Manufactured according to ISO / IEC 11801, ANSI/TIA 568 B.2, EN-50173, CPR Fca

TECHNICAL SPECIFICATIONS

Conductor	Bare copper : 0.57±0.01 mm
Insulation	HDPE : 1.10±0.05 mm
Identification of pairs	
1 pair	Blue - White / Blue
2 pair	Orange - White / Orange
3 pair	Green - White / Green
4 pair	Brown - White / Brown
Filler	PE
Drain	Copper Clad Steel : 0.50±0.01 mm
Shield	Polyester Tape/AL Foil
Ripcord	Yes
Sheath	PE
Color	Black
Bending radius	≥ 8 x Diameter (mm) Installation
Storage temperature	-15°C—+70°C

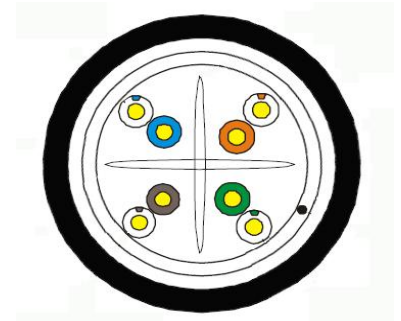

ELECTRICAL CHARACTERISTICS

n° Pairs.xΦmm	Conductor Resistance Ω/km	Resistance Unbalance	Cap. between cond. pair nF / 100m	Velocity of Propagation %	Impedance Ω	ΦExt. (Appvox) mm
4x2x0.57	max.73	max.4%	/	69	100±15	7.3±0.2

Frequency (MHz)	RL ≥dB	ATT ≤dB/100m	NEXT ≥dB	DELAY ≤ns/100m	PS NEXT ≥dB	EL FEXT ≥dB/100m	PS EL FEXT ≥dB 100m
1	20.0	2.03	74.3	570.00	72.3	67.8	64.8
4	23.0	3.78	65.3	552.00	63.3	55.8	52.8
8	24.5	5.32	60.8	546.73	58.8	49.7	46.7
10	25.0	5.95	59.3	545.38	57.3	47.8	44.8
16	25.0	7.55	56.2	543.00	54.2	43.7	40.7
20	25.0	8.47	54.8	542.05	52.8	41.8	38.8
25	24.3	9.51	53.3	541.20	41.3	39.8	36.8
31.25	23.6	10.67	51.9	540.44	49.9	37.9	34.9
62.5	21.5	15.38	47.7	538.55	45.4	31.9	28.9
100	20.1	19.80	44.3	537.60	42.3	27.8	24.8
200	18.0	28.98	39.8	536.54	37.8	21.8	18.8
250	17.3	32.85	38.3	536.27	36.3	19.8	16.8

Appliance

Cable for data transmission in structured cabling networks (LAN), horizontal and secondary facilities.

Packing

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.