


LATIGUILLO LC/LC SIMPLEX UPC OM3

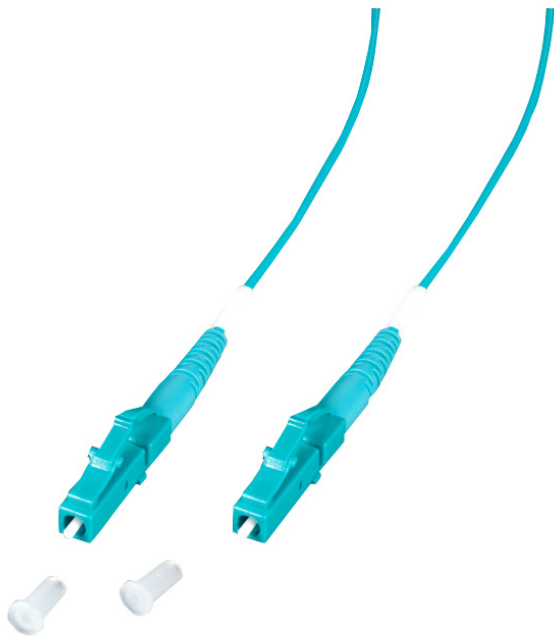

✓ Grado A de fibra

✓ Pulido UPC. Conectores LC-LC

✓ Simplex Model

✓ cubierta LSZH

Descripción

El cable de conexión de fibra óptica utilizado principalmente en el panel de conexión o para la conexión entre las salidas y el terminal

Equipo Es ampliamente utilizado para transmisión de datos de alta velocidad de bits, telecomunicaciones, instrumentos de prueba, CA terminaciones de dispositivos interactivos, LAN / WAN y FTTX.



Optical specifications

Parameters	Value
Typical Insertion Loss	≤ 0.20 dB
Max Insertion Loss	≤ 0.25 dB
Durability(500 Mating Times)	Δ I. L. ≤ 0.25 dB
Tensile Load	7.0kg
Bend Radius	3.8cm
Operating Temperature	-20°C ~ +75°C
Storage Temperature	-20°C ~ +85°C

Mechanical Diagram

Material	1	Dust cap	PE
	2	Outer housing	PBT
	3	Boot	TPE
	4	Laber ring	PE
	5	Heat shrink tube	PE
	6	Cable	Outer Sheath Type:LSZH
Fiber Type:G652D			
Cable Diameter:1.9mm.			

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.