

Panel UTP Cat. 6 24 puertos 19" 1U LSA 250 Mhz 1 Gbit IExcelt



PRODUCT DESCRIPTION

- This Empty Patch Panel belongs to the barpa cabling system. It accepts connectors from category 6 to 6A, UTP and STP. Has a very special design with a rear cable retention system with adjustable mechanical adjustment, that promotes quick installation and fast termination, avoiding the traditional fastening system by cable tie. Includes tag holder with plastic protection for identification of RJ 45, also with earth connection. For Modular Keystone.

• STANDARD CONFORMITY

EIA 19-inch

• PHYSICAL CHARACTERISTICS

Chassis	Black Electrostatic Powder-Coated Steel: phosphor bronze with tin plating over nickel
Color	Black (RAL9005)
Plasti	Fire self-extinguish high impact plastic

• ELECTRICAL CHARACTERISTICS

Contact Resistance (M Ω)	200
Insulation resistance (M Ω Min 500V DC)	500
Withstand Voltage	DC 1000V AC 700V RMS 60Hz, 1min

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

Panel UTP Cat. 6 24 puertos 19" 1U LSA 250 Mhz 1 Gbit IExcelt




• ENVIRONMENTAL CONDITIONS

Operating Temperature (°C)	-10 to +60
Storage Temperature (°C)	-40 to +70

• MECHANICAL SPECIFICATIONS

Color Code	TIA/EIA 568A (international) and 568B (AT&T Standard) Wiring For Easy Installation
IDC Contacts - Solid Cable	Accept 22-24 AWG solid with a insulation diameter of 0.55-0.45 mm
IDC Contacts - Stranded Cable	Accept 22-26 AWG stranded with a insulation diameter of 0.76-0.48 mm
Insertion Life	750 times plugging
Plug Inforce (N)	< 30
Cable OD (mm)	5.0 - 8.5
Contact	Phosphor bronze with 4-6μ" gold plating

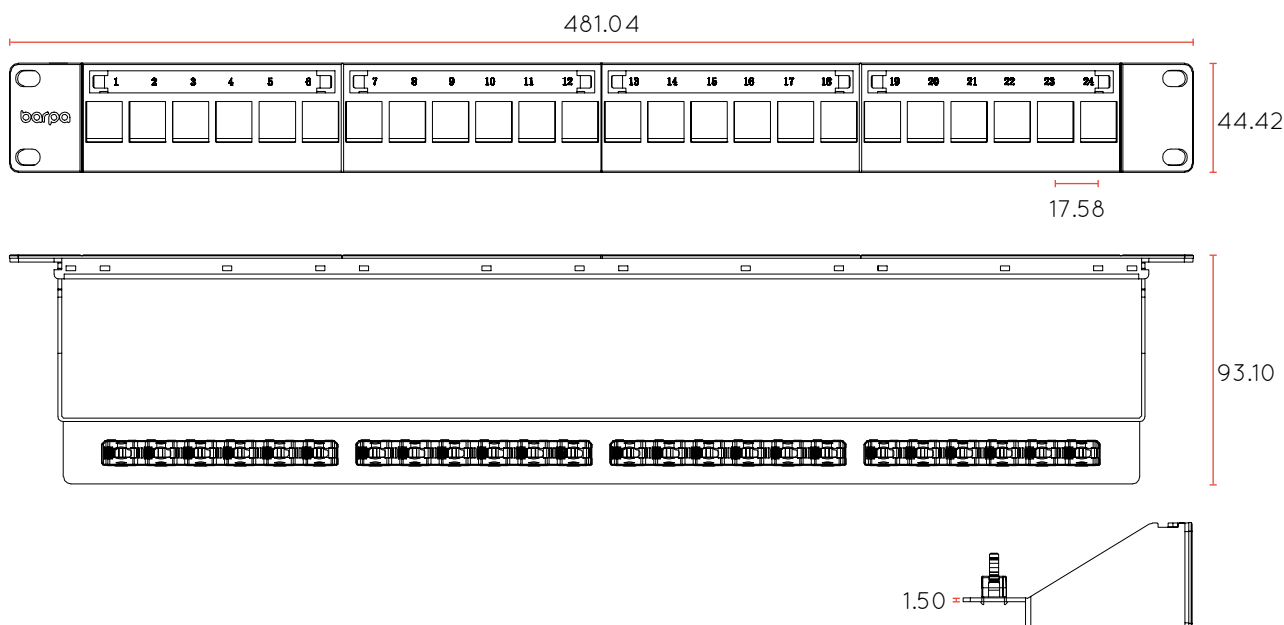

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.