


# CABLE USB 2.0 MEJORADO TIPO A M/TIPO B M



Supports data transmission rates up to 480 Mbit/s. Wire construction: AWG28 / AWG24. Shielded: folie + braiding. Plug moulded.

**Type of connector connection 1:** USB-B  
**Number of poles connection 1:** 4  
**Connection type connection 1:** plug  
**Type of connector connection 2:** USB-B  
**Number of poles connection 2:** 4  
**Connection type connection 2:** plug

## TECHNICAL PARAMETERS

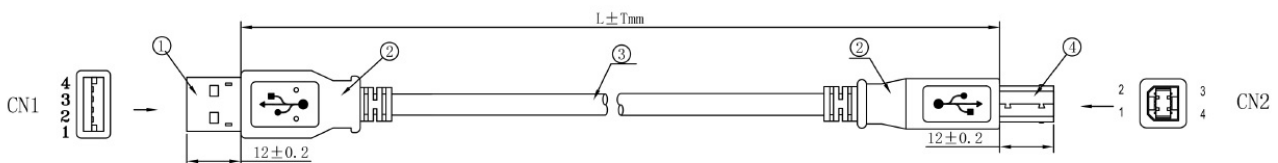


**NOTE:** 1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P  
 24AWGx2C USB2.0 HIGHSPEED CABLE  
 2. RoHS compliant.  
 3. Operating Temperature: -15°C-80°C

NO.	MAT. NAME	DESCRIPTION	Q' TY
4	CONNECTOR	USB B TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	1 Set
3	CABLE	28AWG*1P+24AWG*2C+AL+B USB2.0 HIGHSPEED CABLE JACKET:PVC/GREY OD: 4.5±0.2mm	1
2	OVERMOLD	PVC COLOR:GREY	10g
1	CONNECTOR	USB A TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR	1 Set

NOTE 1:

GREY	
ITEM NO.	LENGTH
K5255. 0, 5	500 ± 5mm
K5255. 1	1000 ± 10mm
K5255. 1, 5	1500 ± 15mm
K5255. 1, 8	1800 ± 18mm
K5255. 3	3000 ± 30mm
K5255. 5	5000 ± 50mm



Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.