



Slim patchcord 6A UTP LSZH Cu IDEAL



• ESPECIFICACIONES :



- Testeados bajo la normativa ISO11801 & EN50173 & ANSI/TIA568C.2
- Fluke test limit: ISO 11801 CHANNEL CLASS EA
- CAT6A UTP : 4x2x28AWG. Tipo Slim (Delgados).
- Diámetro exterior: 3.6 ± 0.2 mm.
- Conectores Macho con cubreconector.
- 100 % Cobre
- Cubierta LSZH.
- Incluye conectores RJ-45.
- Empaquetados individualmente.
- Color del cable y del manguito en Gris, Rojo, Verde, Amarillo, Azul, Negro, Blanco
- Otras medidas y colores consultar.

Ideal Technology has a policy of continuous improvement. Specifications are subject to change without notice.

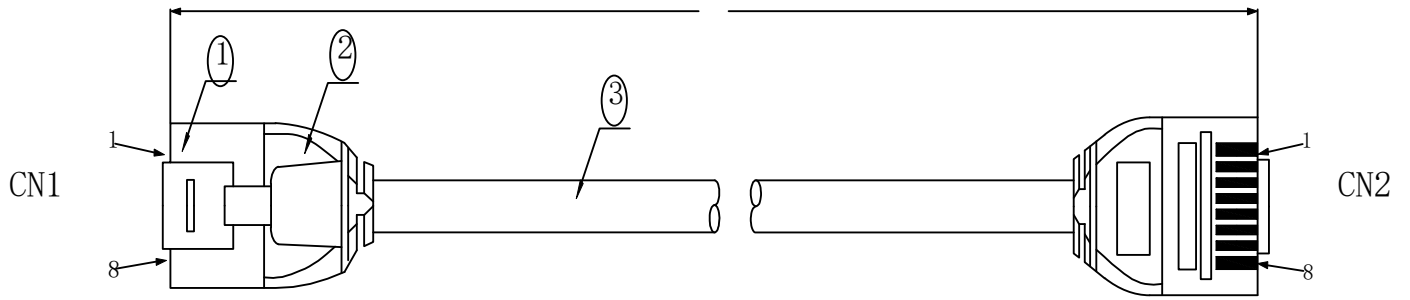

PIN OUT

CN1 (568B) CN2 (568B)

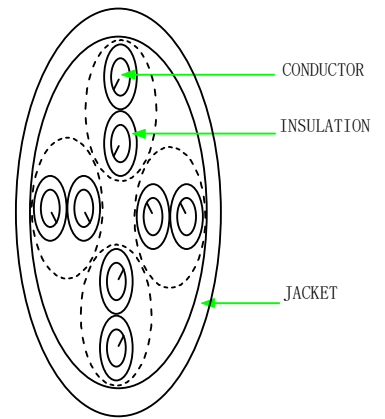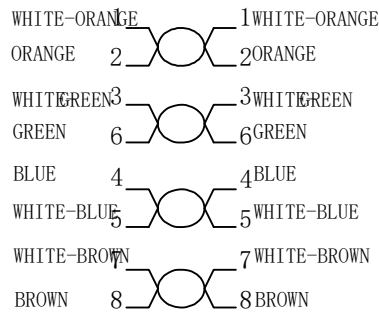


NOTE:

1. Fluke Channel Test ISO 11801 channel Class Ea
2. RoHS2.0 AND REACH compliant
3. Electrical 100% open short & miss wire test;
- 4.

Minimum of the bending radius

28

6. Minimum of the bending radius is 30mm (Suitable for all meters)

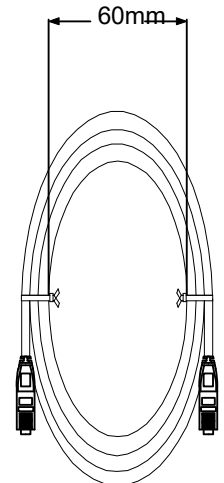

MATERIAL LIST

③	CABLE	CAT. 6A U/UTP CABLE (28AWG+BC*1P)*4BLUE 6	1	
②	Over mold	48P PVC/ B L U E	2	
①	Plug	RJ45 8P8C Unshielded Plug, PIN GOLD PLATED 3u", TRANSPARENT	2	
NO.	PARTSNAME	SPECIFICATION STANDARD	QT' Y	REMARK

DESC. ROL E Cat. 6A UTP Patch Cord, LSOH, Slim, W

NEW

2019-06-17 A

BY CHK REVISIONRECORDMODIFICATIONS DATE REV.