
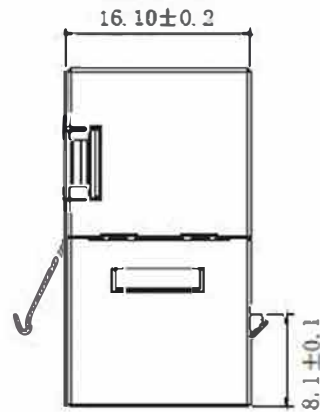

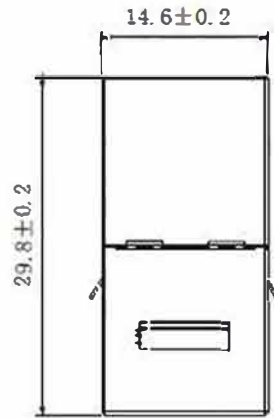



unit: mm

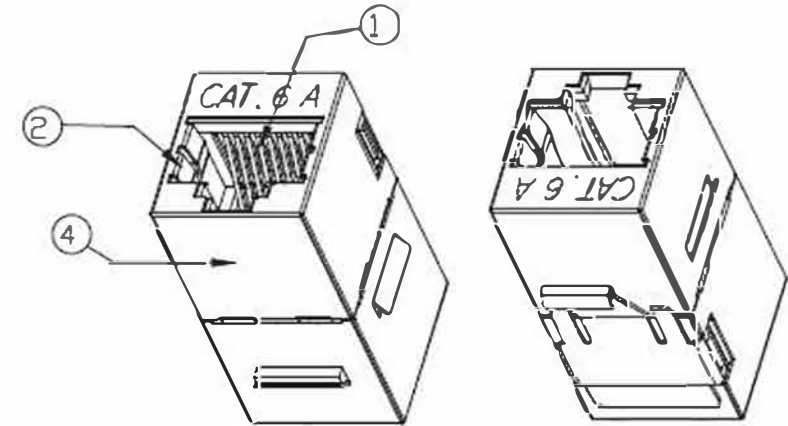

NOTES:

ELECTRICAL:

1. Contact Resistance : 20mΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
4. Component testing for Cat. 6A to ISO/IEC 11801 Ed. 2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568-C.2 (2009-08)

ENVIRONMENTAL:

1. Operation temperature: -10℃-+60℃
2. Storage temperature : -40℃-+70℃

MECHANICAL

1. RJ45 Contact Life: 750 Times Min
2. Plug inforce: <30N

RoHS 2.0 and REACH Compliant

MATERIAL LIST:

④	Shielded	Nickel plated brass	1	
③	PCB	FR-4 UL94V0	1	
②	main body	white ABS	2	
①	RJ45 JACK	8P8C, Gold Plated Pin	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

unit	mm			
		NEW	2019-06-17	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	ADHHC6AE
DESC.	Cat. 6A Keystone Coupler, STP, silver

IDEAL
technologies