

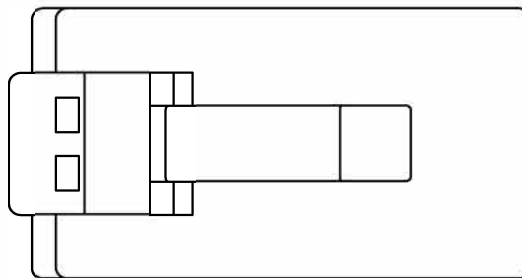



1 2 3 4 5



A

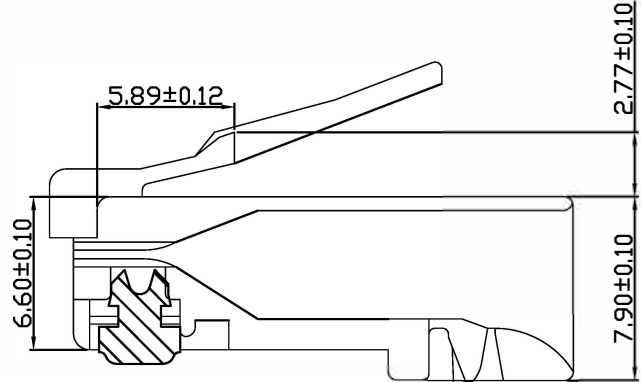

B

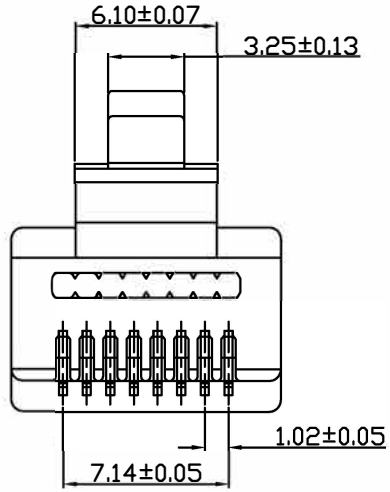

C

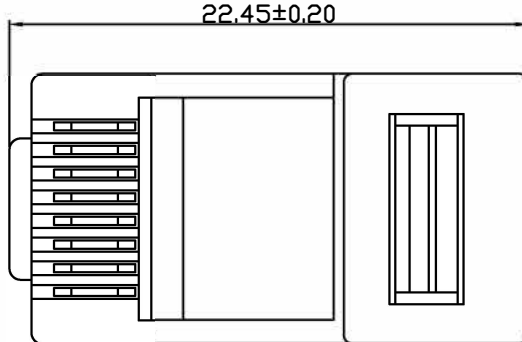


D

NOTES:

1. Material of housing: Polycarbonate, 94V-2, NO Poison.
2. Material contact: C2680
3. Contact area plated gold over $Fu''/3u''/6u''/15u''/30u''$ and $50u''$.
4. Insulation Resistance: $500M\Omega$ min.
5. Withstand Voltage: 1000V, DC/minute.
6. Contact Resistance: $20m\Omega$ max.
7. Durability: 1500 mating circles min.

A

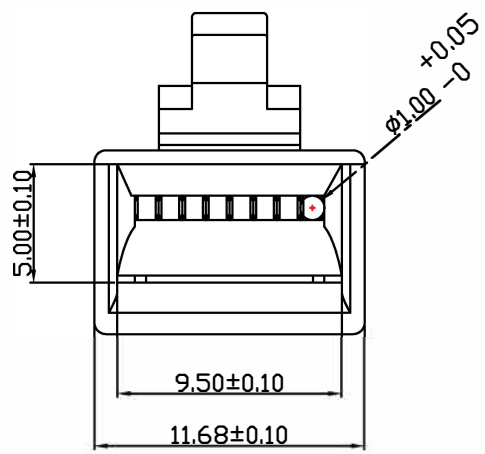

B

C

.XXX±0.05	单位 UNITS:	mm	制图 DR:	Chenkun	品名 NAME:			
.XX±0.10	视角 VIEW:		审核 CHKD:	Chenkun	料号 PART NO.	A801-1X-0010		
.X±0.20	比例 SCALE:	1:1	核准 APPD:	Guolin	图号 DWG NO.	A8011	版本 REV:	X
X±0.25	材料 MAT'L	PC	日期 DATE:	2016.6.24	模号 MODEL		页次 SHEET:	1/1

1 2 3 4 5