


DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,15m

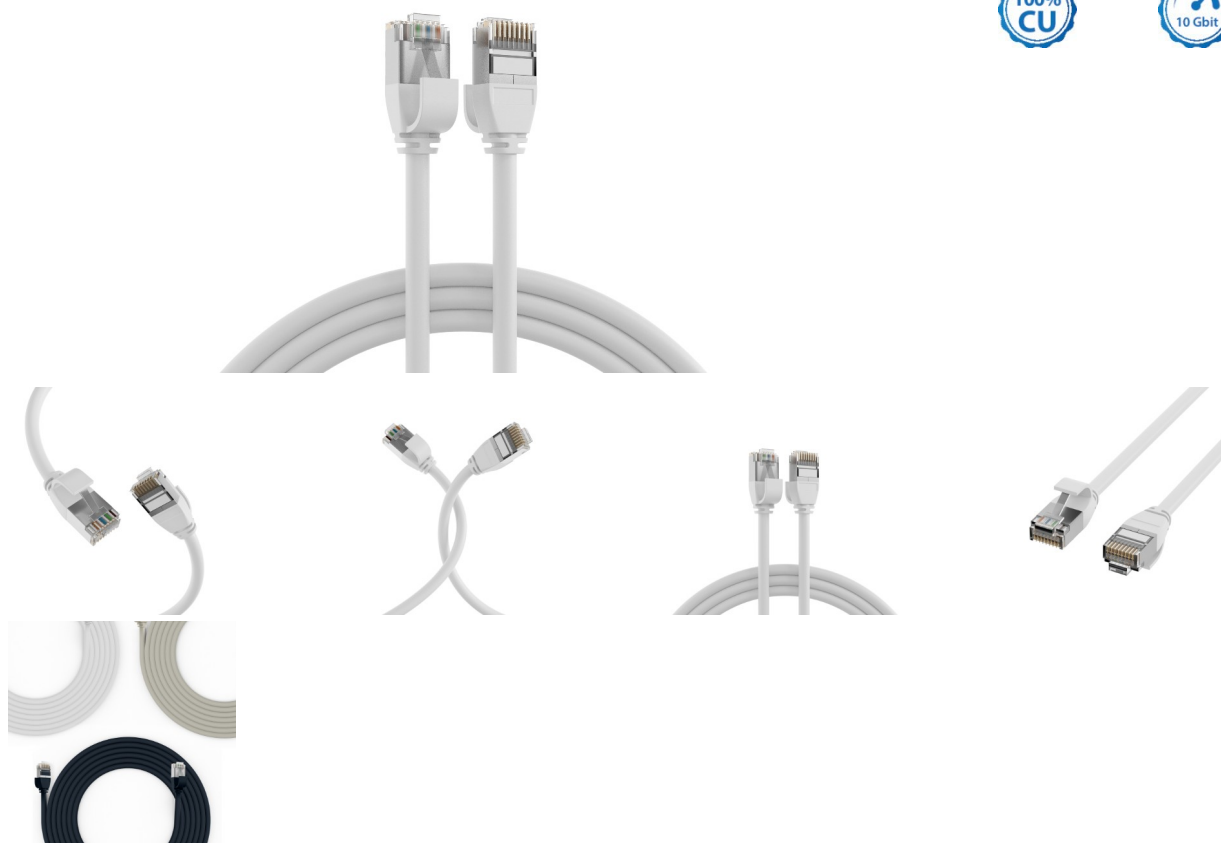

General data

RJ45 flat patch cable Cat.6A U/FTP PVC

The Cat.6A (TIA) patch cable has gold-plated contacts and meets the requirements for 10Gbit Ethernet.

Technical product features

- Cat.6A (TIA)
- U/FTP cable with AWG30/7
- Sheath material made of polyvinyl chloride (PVC)
- Plug connection: RJ45 to RJ45
- With locking lever protection
- Has gold-plated contacts

This datasheet was created automatically on 17-12-2024 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,15m

The sheath of the shielded patch cable is made of polyvinyl chloride (PVC) material. In addition, the cable offers the option of power supply via PoE+ according to IEEE802.3at and PoE according to IEEE802.3af.

The assignment of the particularly short RJ45 plugs is 1:1 and follows TIA/EIA 568B . Suitable for the temperature range -20 - 55 °C.

The Ethernet cable has a copper conductor material and is ideal for applications in structured building cabling, industrial Ethernet and data centers. This achieves a bandwidth of 500 MHz.

Allgemeine Daten	
Connector type	RJ45 short version
Suitable for degree of protection (IP)	IP20
AWG-size	30/7
Fire retardant version	True
Model	Shielded
Length imprint	False
Contacts	Gold plated
Current Rating	max. 1 A
Jacket Material	TPE/LSZH

General data	
Pin assignment	1:1
Locking lever	True
Allocation	acc. TIA/EIA 568B
Colour anti-kink sleeve	white
Cable type	U/FTP
Area of Application	Industrial Ethernet
Anti-kink sleeve	plugged in
Colour outer sheath	white
Halogen free	True
Category	6A (TIA)

Mechanical characteristics	
Conductive shield	Selected shield contact
Bending radius	>16 mm
Mating cycles	2000

Cable construction

This datasheet was created automatically on 17-12-2024 . Technical changes reserved.

DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,15m

Conductor Material	Copper
--------------------	--------

Kabelaufbau

Type of connector connection 2	RJ45 8(8)
Type of connector connection 1	RJ45 8(8)
Cable construction	4x2

Cable sheath

Low smoke	True
Oil resistant (according to EN 60811-404)	False
Silicone-free	True

Kabelmantel

Outer diameter of the cable	4.0 mm
Printing	Cat.6A Patchcord ULTRAFLEX U/FTP TPE 10G www.efb-elektronik.de

Environmental conditions

Temperature range	-20 - 75 °C
-------------------	-------------

Electrical characteristics

Loop resistance	752 Ω/km
Impedance	100 ±15 Ω
Conductor resistance DC	376 Ω/km
Resistance unbalance	< 4 %
POE class	PoE+ acc. to IEEE802.3at
NVP value	76 %
Insulation Resistance	100 MΩ

Elektrische Eigenschaften

Test voltage	1000 (V DC, 1min) core/core und core/screen
Contact Resistance	< 20 mΩ
Operating-/ tempering voltage	max. 50 V DC

Übertragungstechnische Eigenschaften

This datasheet was created automatically on 17-12-2024 . Technical changes reserved.



DATASHEET

RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,15m

Bandwidth	500MHz
-----------	--------

Normen, Zulassungen, Zertifizierungen

Connector	IEC 60603-7-51
-----------	----------------

Standards, approvals, certifications

Cabling standard	EN50173
Oil resistant (acc. EN 60811-2-1)	False

Available variants

ArtNr.	Bezeichnung	Length	Längentoleranz
K5547WS.0,15	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,15m	0.15 m	±5 %
K5547WS.0,25	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,25m	0.25 m	±5 %
K5547WS.0,5	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 0,5m	0.5 m	±5 %
K5547WS.1	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 1m	1.0 m	±5 %
K5547WS.1,5	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 1,5m	1.5 m	±5 %
K5547WS.2	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 2m	2.0 m	±5 %
K5547WS.3	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 3m	3.0 m	±5 %
K5547WS.5	RJ45 Patch Cord Cat.6A U/FTP TPE4mm ultraflex white 5m	5.0 m	±5 %

This datasheet was created automatically on 17-12-2024 . Technical changes reserved.

