

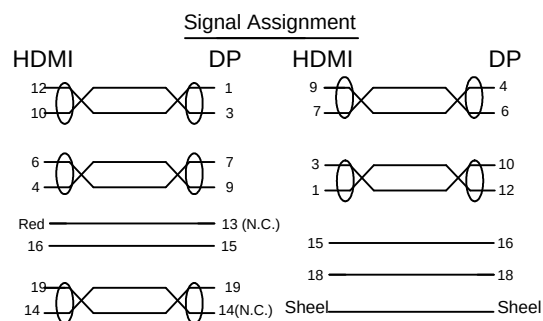


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/01/04	

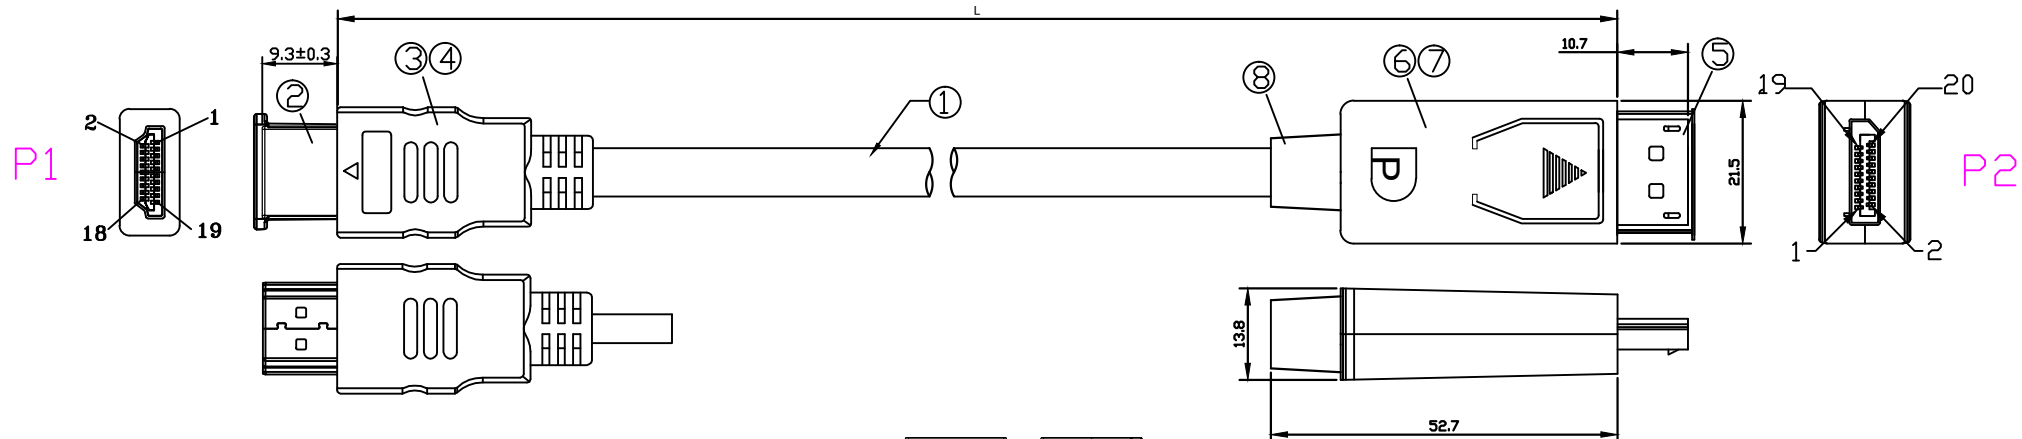


Remark:

- 1.100% Open/Short Test
2. Conductive Resistance: 50hms MAX
3. Insulation Resistance: 10M ohm MIN.
4. HI-POT: DC 300V/10MS.
5. The product is RoHS compliant.
6. Support 1080P/60Hz

Item NO.	Length(m)
K5561SW.1V2	1.0m
K5561SW.2V2	2.0m
K5561SW.3V2	3.0m
K5561SW.5V2	5.0m

⑧	SR	45P PVC, Black	1PC	
⑦	Shell	Top and Bottom Shell, ABS with "D"Black	1PC	
⑥	Internal Mold	Inner Mould PE	1PC	
⑤	Connector	DP male head hook + PCBA with IC(PS8121E), Gold-Plated	1PC	
④	External Mold	Outer Mould 45P PVC, Black	1PC	
③	Internal Mold	Inner Mould PE	1PC	
②	Connector	HDMI A PLUG PIN, Gold-Plated	1PC	
①	Cable	(1/0.254BC*1P+AL+MY)*5+1/0.254*4C+AL+D:1/0.23BC+64ALB+OD5.5mm PVC, Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	
CUSTOMER:		UNIT	
CUSTOMER P/N:		SCALE	
DESCRIPTION		PAGE NO	
APPROVAL		DATE	
CHECKED		DRAWN	