


DATASHEET

Duplex Patchcable Push/Pull LC-LC OM4 10m LSZH 2mm heatherviolet

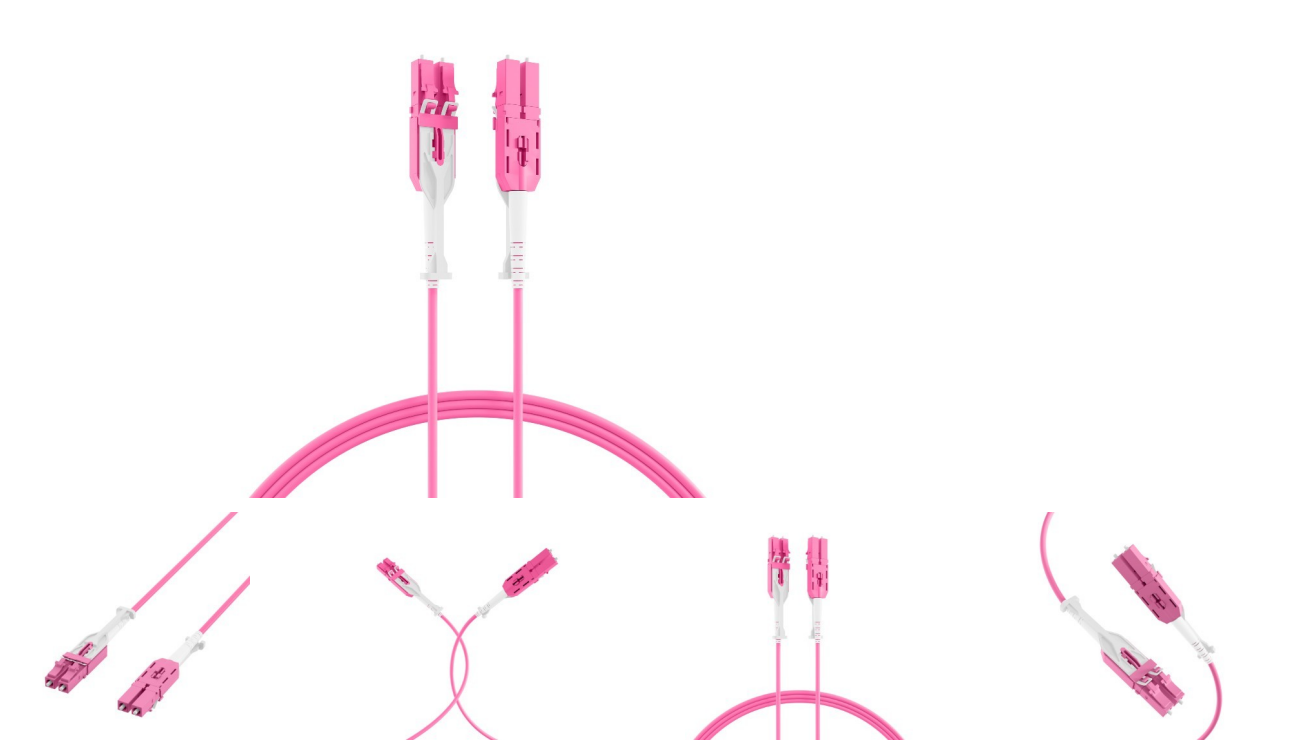

General data

The LC HD Uniboot Jumper has a long unlock latch, due to unlock in the easiest way in HD patchpanel. The Polarity or Coding of the Duplex connector can be changed in the easiest way that it can reach the requirements of the application. The Jumper is available in the categories OM3, OM4 and G657A1.

Allgemeine Daten

Connector colour 2	erica violet
Ultra low loss connectors with maximum insertion loss of 0.10 dB in OM4.	
Number of fibres	2
Jacket Material	LSZH
Connector colour 1	erica violet

General data

Colour outer sheath	erica violet
Halogen free	acc. IEC60754-1
Cable type	I-V(ZN) H

This datasheet was created automatically on 31-01-2025 . Technical changes reserved.

calle del Horno, 85, en el Polígono Industrial
"Villa de Azafía", 45230 Numancia de la
Sagra (TOLEDO)

info@sunprored.es
comercial@sunprored.es

915 00 79 63

DATASHEET

Duplex Patchcable Push/Pull LC-LC OM4 10m LSZH 2mm heatherviolet

Anti-kink sleeve	put-on
Bend optimized fiber	OM4 acc. to IEC60793-2-10 type A1a.2 and A1a.3
Category	OM4

Mechanical characteristics

Min. Bending radius (Dynamic)	20xOD
Cable Ø	2.0 mm
Max. Tension	160 N
Min. Bending radius (Static)	10xOD

Cable construction

Cable Construction	Duplex
--------------------	--------

Kabelaufbau

Fibre type	Multi mode 50/125
Type of connector connection 1	LC
Type of connector connection 2	LC

Cable sheath

Low smoke	acc. IEC61034-1
-----------	-----------------

Umgebungsbedingungen

Storage Temperature	-20 - 70 °C
Operating Temperature	-20 - 70 °C

Übertragungstechnische Eigenschaften

Quality class Multimode	A/1 according to IEC-61753-222-2
-------------------------	----------------------------------

Normen, Zulassungen, Zertifizierungen

Connector Conform to Standard	IEC 61754-20
Cable Conform to Standard	IEC 60793-2

Available variants

ArtNr.	Bezeichnung	Length Längentoleranz
--------	-------------	-----------------------

This datasheet was created automatically on 31-01-2025 . Technical changes reserved.

calle del Horno, 85, en el Polígono Industrial
"Villa de Azafra", 45230 Numancia de la
Sagra (TOLEDO)

info@sunprored.es
comercial@sunprored.es

915 00 79 63

DATASHEET

Duplex Patchcable Push/Pull LC-LC OM4 10m LSZH 2mm heatherviolet

LCLCOM4-UNI-0,5	Duplex Patchcable Push/Pull LC-LC OM4 0,5m LSZH 2mm heatherviolet	0.5 m	±5 %
LCLCOM4-UNI-1	Duplex Patchcable Push/Pull LC-LC OM4 1m LSZH 2mm heatherviolet	1.0 m	±5 %
LCLCOM4-UNI-2	Duplex Patchcable Push/Pull LC-LC OM4 2m LSZH 2mm heatherviolet	2.0 m	±5 %
LCLCOM4-UNI-3	Duplex Patchcable Push/Pull LC-LC OM4 3m LSZH 2mm heatherviolet	3.0 m	±5 %
LCLCOM4-UNI-5	Duplex Patchcable Push/Pull LC-LC OM4 5m LSZH 2mm heatherviolet	5.0 m	±5 %
LCLCOM4-UNI-7,5	Duplex Patchcable Push/Pull LC-LC OM4 7,5m LSZH 2mm heatherviolet	7.5 m	±5 %
LCLCOM4-UNI-10 Dup	ex Patchcable Push/Pull LC-LC OM4 10m LSZH 2mm heatherviolet	10.0 m	±5 %
LCLCOM4-UNI-15 Dup	ex Patchcable Push/Pull LC-LC OM4 15m LSZH 2mm heatherviolet	15.0 m	±5 %
LCLCOM4-UNI-20 Dup	ex Patchcable Push/Pull LC-LC OM4 20m LSZH 2mm heatherviolet	20.0 m	±5 %
LCLCOM4-UNI-30 Dup	ex Patchcable Push/Pull LC-LC OM4 30m LSZH 2mm heatherviolet	30.0 m	±5 %

This datasheet was created automatically on 31-01-2025 . Technical changes reserved.

calle del Horno, 85, en el Polígono Industrial
"Villa de Azafra", 45230 Numancia de la
Sagra (TOLEDO)

info@sunprored.es
comercial@sunprored.es

915 00 79 63