


DATASHEET

Fiber Pigtail ST OS2 G652D-Yellow 2m - 1 piece

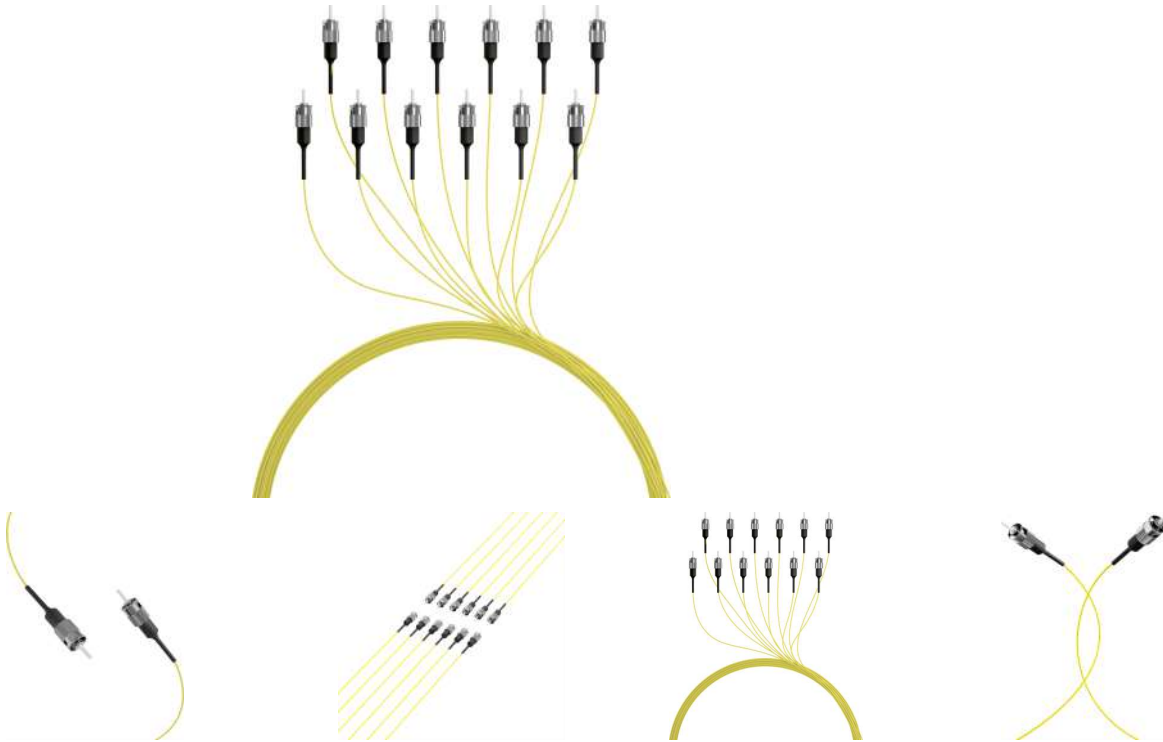

General data

The ST fiber pigtail has a primary coating (900μ) in the colour of the respective category (see table). The colour of the primary coating is equal to the colour of the secondary coating. Every PU contains an individual measuring protocol.

Technical properties

APC version	False
Anti-kink sleeve	put-on
Bend optimized fiber	no
Cable Conform to Standard	IEC60793-2
Category	OS2 G652D
Color	yellow
Connector Conform to Standard	IEC61754-2
Core type	Semi tight
Fibre type	Singlemode 9/125
Insertion loss 1310nm	< 0.3 dB
Jacket material	LSZH
Length	2.0 m
Max. Tension	3 N

DATASHEET

Fiber Pigtail ST OS2 G652D-Yellow 2m - 1 piece

Minimaller Biegeradius Dynamic	20xOD
Mion. Bending Radius Static	10xOD
Operating temperature	-20 - 70 °C
Outer diameter	0,9 mm
Quality class singlemode	B/2 acc. IEC 61753-1
Type	Conductor pigtail
Type of connector	ST

Available variants		
ArtNr.	Bezeichnung	Unique
O1003.2	Fiber Pigtail ST OS2 G652D-Yellow 2m - 1 piece	Unique

Drawings

