

DATASHEET

Fiber Pigtail SC OS2 G652D-Yellow 2m - 1 piece



General data

The SC fiber pigtail has a primary coating (900µ) in the colour of the respective category (see table). The colour of the primary coating is equal to the colour of the secondary coating. Every PU contains an individual measuring protocol.

Allgemeine Daten

Core type	Semi tight
Outer Diameter	0.9 mm
APC version	False
Type	Conductor pigtail
Type of connector	SC

This datasheet was created automatically on 29-08-2024 . Technical changes reserved.

DATASHEET

Fiber Pigtail SC OS2 G652D-Yellow 2m - 1 piece

General data	
Insertion loss 1310nm	< 0.3 dB
Anti-kink sleeve	Put-on
Connector Colour	blue
Category	OS2 acc. to ITU-T G.652.D
Colour	yellow
Mechanical characteristics	
Minimaler Biegeradius Dynamic	20xOD
Max. Tension	3 N
Mechanische Eigenschaften	
Mion. Bending Radius Static	10xOD
Kabelaufbau	
Fibre type	Single mode 9/125
Cable sheath	
Jacket Material	LSZH
Abmessungen	
Length	2.0 m
Umgebungsbedingungen	
Operating Temperature	-20 - 70 °C
Übertragungstechnische Eigenschaften	
Quality class singlemode	B/2 acc. IEC 61753-1
Normen, Zulassungen, Zertifizierungen	
Cable Conform to Standard	IEC60793-2
Standards, approvals, certifications	
Connector Conform to Standard	IEC61754-4

This datasheet was created automatically on 29-08-2024 . Technical changes reserved.




DATASHEET

Fiber Pigtail SC OS2 G652D-Yellow 2m - 1 piece

Available variants

ArtNr.	Bezeichnung
01023.2	Fiber Pigtail SC OS2 G652D-Yellow 2m - 1 piece

Drawings

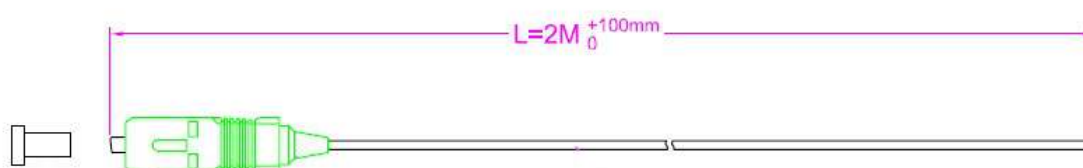

This datasheet was created automatically on 29-08-2024 . Technical changes reserved.