










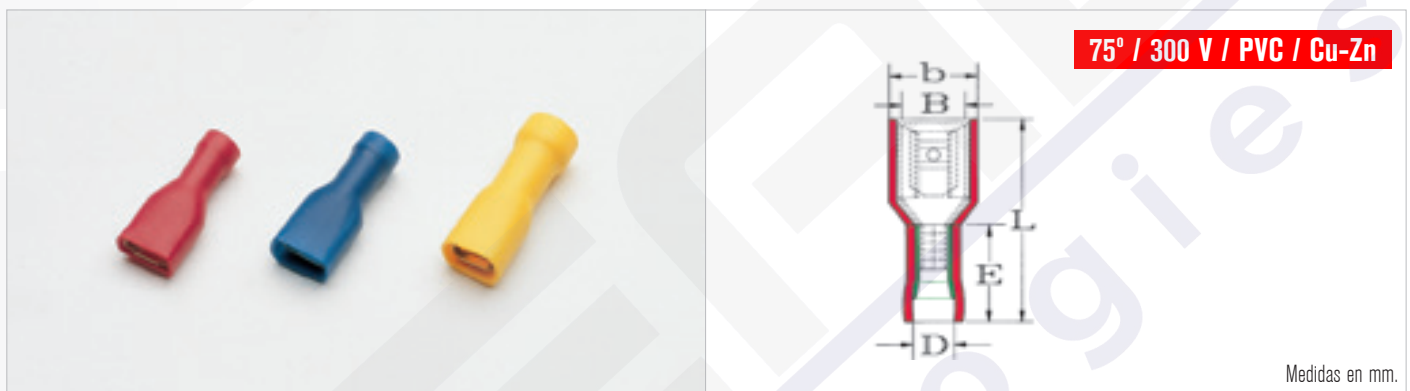








# Terminal faston hembra aislado 6.3 0.5-1.5 Rojo

Ref.: PVCC-15063-2



Art.	mm <sup>2</sup> /AWG	 	B	b	L	D	E	
 PVCC-15028-2	0.50-1.50 / 20-16	2.8 x 0.5	3.2	5.4	19.0	4.7	10.5	100/1000
 PVCC-15028-2-1		2.8 x 0.8	3.2	5.4	19.0			
 PVCC-15048-2		4.8 x 0.5	5.0	7.4	20.0			
 PVCC-15048-2-1		4.8 x 0.8	5.0	7.4	20.0			
 PVCC-15063-2		6.3 x 0.8	6.8	9.0	22.0			
 PVCC-25028-2	1.50-2.50 / 16-14	2.8 x 0.5	3.2	5.4	19.0	4.9	11.0	100/1000
 PVCC-25028-2-1		2.8 x 0.8	3.2	5.4	19.0			
 PVCC-25048-2		4.8 x 0.5	5.0	7.4	20.5			
 PVCC-25048-2-1		4.8 x 0.8	5.0	7.4	20.5			
 PVCC-25063-2		6.3 x 0.8	6.8	9.0	23.0			
 PVCC-55048-2	4.00-6.00 / 12-10	4.8 x 0.5	5.0	7.4	22.0	6.5	14.0	50/500
 PVCC-55048-2-1		4.8 x 0.8	5.0	7.4	22.0			
 PVCC-55063-2		6.3 x 0.8	6.8	9.0	25.5			
 PVCC-55094-2		9.4 x 1.2	9.9	13.0	30.5			

Ideal Technology tiene una política de mejora continua. Las especificaciones están sujetas a cambios sin previo aviso.