




LanCable Cat6 F/ UTP CPR Dca

Application:

100 Base-TX
100VG-AnyLAN
1000Base-T(Gigabit Ethernet)ATM
Noisy Environments

Product Description:

Rated temperature:60°C, 75°C, 90°C
Reference Standard:UL444> UL1581
Bare solid copper conductor
RoHS/REACH Complied PVC PE or LSZH Jacket
Complies to ANSI/TIA-568-C.2, ISO/IEC 11801,
EN50173&IEC61156-5
Installation temperature:-30°C +50°C
Minimum bending radius:8D

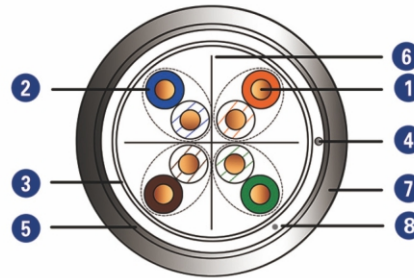

- ① Inner conductor
- ② Teflon
- ③ Solyster
- ④ Drain Wire
- ⑤ Aluminum Foil
- ⑥ Seperator
- ⑦ Jacket
- ⑧ Ripcord



Electrical characteristics

Frequency MHz	Impedance Ohm	RL ≥dB	Attention ≤ dB/100m	NEXT ≥ dB/100m	ELFEXT ≥ dB/100m	PS NEXT ≥ dB/100m	PS ELFEXT ≥ dB/100m	Delay Skew ns/100m	NVP
1	100±15	20.0	1.9	74.3	67.8	72.3	64.8	<45	68%
4		23.0	3.7	65.3	61.8	63.3	52.8		
8		24.5	5.3	60.3	55.7	58.8	46.7		
10		25.0	5.9	59.3	53.8	57.3	44.8		
16		25.0	7.5	56.3	49.7	54.3	40.7		
20		25.0	8.4	54.8	47.8	52.8	38.7		
25		24.3	9.5	53.4	45.8	51.4	36.8		
31.25		23.6	10.6	51.9	43.9	49.9	34.9		
62.5		21.5	15.4	47.4	37.9	45.4	28.8		
100		20.1	19.8	44.3	33.8	42.3	24.8		
155		18.8	25.1	41.4	27.8	39.4	20.9		
200		18.0	29.0	39.8	25.8	37.8	18.7		
250		17.3	32.8	38.3	24.3	36.3	16.8		
300		100±20	16.8	36.4	37.1	22.9	35.1		
* 350	16.3		39.8	36.1	21.8	34.1	13.9		
* 400	15.9		43.0	35.3	20.7	33.7	12.7		
* 450	100±22	15.5	46.3	34.5	19.8	32.5	11.7		
* 500		15.2	48.9	33.8	19.0	31.8	10.8		
* 550		14.9	51.8	33.2	12.9	31.2	9.9		

Marking

Type	ink
Color	white
Text (4 pairs)	TS LAN CAT6 F/UTP LSZH 4PAIRS 350MHz TS COM GRADE 2 LSZH 4PAIRS - (batch number) - (marking metric) M
Text (2x4 pairs)	TS LAN CAT6 F/UTP LSZH 2x4PAIRS 350MHz TS COM GRADE 2 LSZH 4PAIRS - (batch number) - (marking metric) M
Example	TS LAN CAT6 F/UTP LSZH 2x4PAIRS 350MHz TS COM GRADE 2 LSZH 4PAIRS -M123456-1000M
Note	The batch number is indicated when ordering.